


COUNTERBALANCE VALVE (HB3H) SIZE 025 / 03 / 06

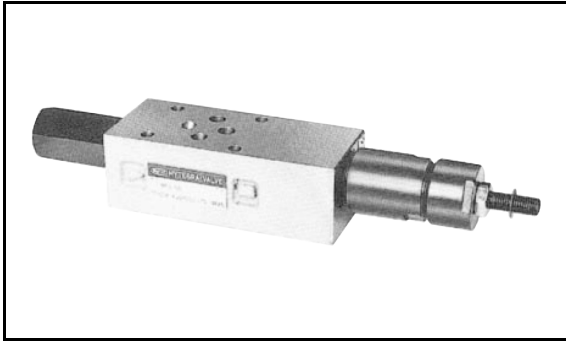


SPECIFICATIONS

Controlled Port	Pilot Type	Model	Max. Operating Pressure (MPa)	Rated Flow (L/min)	Max. Flow (L/min)	Symbol	Pressure Adjustment Range Check Valve Cracking Pressure (MPa)
A	Internal Pilot	HB3H-A-D*K-025B	25	20	40		[Pressure adjustment range] Size 025 * symbol 4: 0.7 to 7 5: 3.5 to 14 Size 03, 06 * symbol 4: 0.7 to 7 5: 3.5 to 14 6: 10.5 to 21 [Check valve cracking pressure] 0.04
		HB3H-A-D*K-03	21	40	80		
		HB3H-A-D*K-06		120	190		
	External Pilot	HB3H-A-D*EK-025B	25	20	40		
		HB3H-A-D*EK-03	21	40	80		
		HB3H-A-D*EK-06		120	190		
B	Internal Pilot	HB3H-B-D*K-025B	25	20	40		
		HB3H-B-D*K-03	21	40	80		
		HB3H-B-D*K-06		120	190		
	External Pilot	HB3H-B-D*EK-025B	25	20	40		
		HB3H-B-D*EK-03	21	40	80		
		HB3H-B-D*EK-06		120	190		


EXTERNAL DIMENSIONS

● HB3H-A-D*(E)K-025B

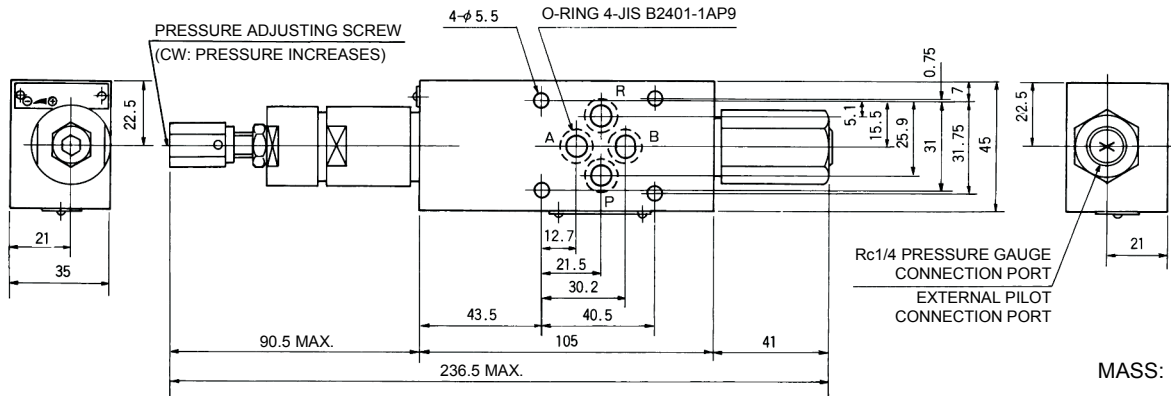


MASS: 1.4 kg

● HB3H-B-D*(E)K-025B

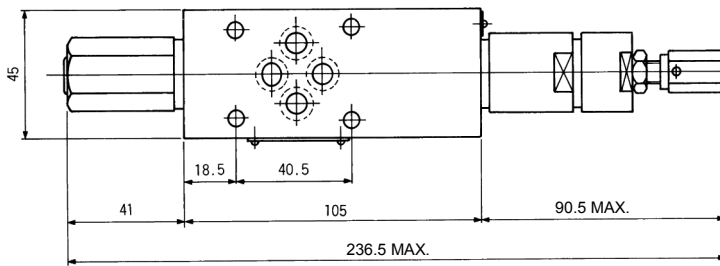

MASS: 1.4 kg

● HB3H-*-D*(E)K-03

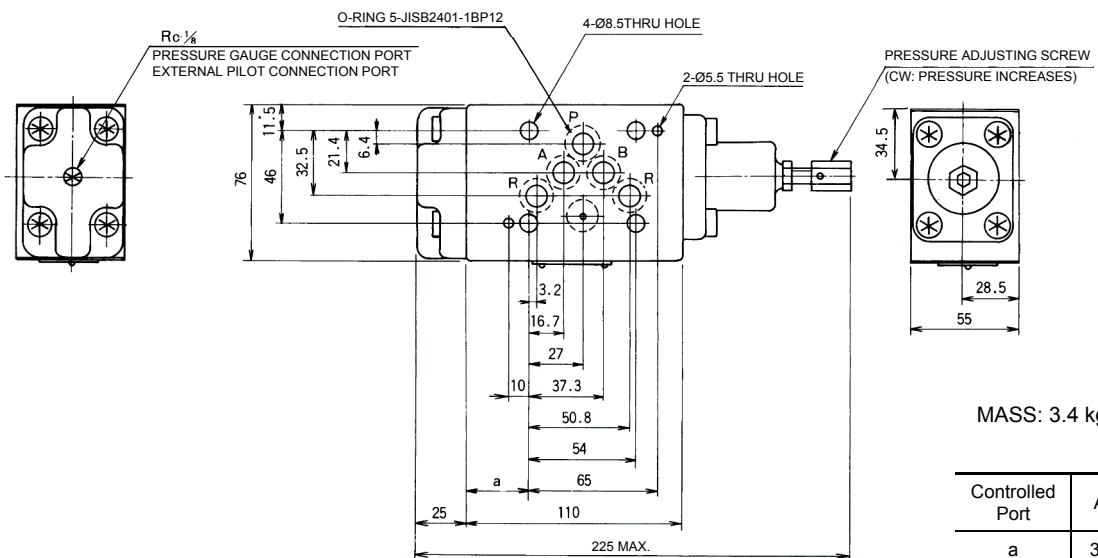

MASS: 3.4 kg

Controlled Port	A	B
a	32	24

● HB3H-*-D*(E)K-06

