


FLOW CONTROL VALVE WITH FLOW ADJUSTING DIAL (HF3H) SIZE 025

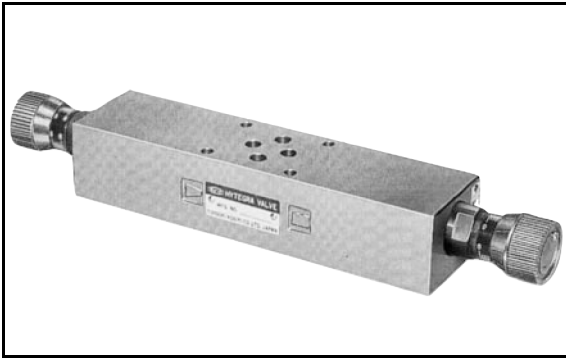

SPECIFICATIONS

Controlled Port	Type	Model	Max. Operating Pressure (MPa)	Flow Adjustment Range (L/min)	Cracking Pressure of Check Valve (MPa)	Symbol	
P	—	HF3H-P-K24S-025B	25	0.3 to 24	0.04		
		HF3H-P-K6S-025B		0.3 to 6			
A	Meter-out	HF3H-A-K24SK-025B		0.3 to 24		0.04	
		HF3H-A-K6SK-025B		0.3 to 6			
	Meter-in	HF3H-AY-K24SK-025B		0.3 to 24			
		HF3H-AY-K6SK-025B		0.3 to 6			
B	Meter-out	HF3H-B-K24SK-025B		0.3 to 24		0.04	
		HF3H-B-K6SK-025B		0.3 to 6			
	Meter-in	HF3H-BY-K24SK-025B		0.3 to 24			
		HF3H-BY-K6SK-025B		0.3 to 6			
A / B	Meter-out	HF3H-W-K24SK-025B		0.3 to 24		0.04	
		HF3H-W-K6SK-025B		0.3 to 6			
	Meter-in	HF3H-WY-K24SK-025B	0.3 to 24				
		HF3H-WY-K6SK-025B	0.3 to 6				

EXTERNAL DIMENSIONS

